

TRAITE DE COOPERATION EN MATIERE DE BREVETS

PCT

RAPPORT DE RECHERCHE INTERNATIONALE

(article 18 et règles 43 et 44 du PCT)

Référence du dossier du déposant ou du mandataire 341764/18705	POUR SUITE voir la notification de transmission du rapport de recherche internationale (formulaire PCT/ISA/220) et, le cas échéant, le point 5 ci-après A DONNER	
Demande internationale n° PCT/FR 01/ 00720	Date du dépôt international (<i>jour/mois/année</i>) 09/03/2001	(Date de priorité (la plus ancienne) (<i>jour/mois/année</i>) 10/03/2000
Déposant		
VINGOT, Jean-Gaël		

Le présent rapport de recherche internationale, établi par l'administration chargée de la recherche internationale, est transmis au déposant conformément à l'article 18. Une copie en est transmise au Bureau international.

Ce rapport de recherche internationale comprend 3 feilles.

Il est aussi accompagné d'une copie de chaque document relatif à l'état de la technique qui y est cité.

1. Base du rapport

- a. En ce qui concerne la **langue**, la recherche internationale a été effectuée sur la base de la demande internationale dans la langue dans laquelle elle a été déposée, sauf indication contraire donnée sous le même point.
 - la recherche internationale a été effectuée sur la base d'une traduction de la demande internationale remise à l'administration.
- b. En ce qui concerne les **séquences de nucléotides ou d'acides aminés** divulguées dans la demande internationale (le cas échéant), la recherche internationale a été effectuée sur la base du listage des séquences :
 - contenu dans la demande internationale, sous forme écrite.
 - déposée avec la demande internationale, sous forme déchiffrable par ordinateur.
 - remis ultérieurement à l'administration, sous forme écrite.
 - remis ultérieurement à l'administration, sous forme déchiffrable par ordinateur.
 - La déclaration, selon laquelle le listage des séquences présenté par écrit et fourni ultérieurement ne vas pas au-delà de la divulgation faite dans la demande telle que déposée, a été fournie.
 - La déclaration, selon laquelle les informations enregistrées sous forme déchiffrable par ordinateur sont identiques à celles du listage des séquences présenté par écrit, a été fournie.

- 2. **Il a été estimé que certaines revendications ne pouvaient pas faire l'objet d'une recherche** (voir le cadre I).
- 3. **Il y a absence d'unité de l'invention** (voir le cadre II).

4. En ce qui concerne le **titre**,

- le texte est approuvé tel qu'il a été remis par le déposant.
- Le texte a été établi par l'administration et a la teneur suivante:

5. En ce qui concerne l'**abrégé**,

- le texte est approuvé tel qu'il a été remis par le déposant
- le texte (reproduit dans le cadre III) a été établi par l'administration conformément à la règle 38.2b). Le déposant peut présenter des observations à l'administration dans un délai d'un mois à compter de la date d'expédition du présent rapport de recherche internationale.

6. La figure **des dessins** à publier avec l'abrégé est la Figure n°

- suggérée par le déposant.
- parce que le déposant n'a pas suggéré de figure.
- parce que cette figure caractérise mieux l'invention.

1 _____

Aucune des figures n'est à publier.

RAPPORT DE RECHERCHE INTERNATIONALE

Demande Internationale N°

PCT/FR 01/00720

A. CLASSEMENT DE L'OBJET DE LA DEMANDE
CIB 7 G10D13/02

Selon la classification internationale des brevets (CIB) ou à la fois selon la classification nationale et la CIB

B. DOMAINES SUR LESQUELS LA RECHERCHE A PORTE

Documentation minimale consultée (système de classification suivi des symboles de classement)

CIB 7 G10D

Documentation consultée autre que la documentation minimale dans la mesure où ces documents relèvent des domaines sur lesquels a porté la recherche

Base de données électronique consultée au cours de la recherche internationale (nom de la base de données, et si réalisable, termes de recherche utilisés)

EPO-Internal, WPI Data, PAJ, INSPEC, IBM-TDB, COMPENDEX

C. DOCUMENTS CONSIDERES COMME PERTINENTS

Catégorie	Identification des documents cités, avec, le cas échéant, l'indication des passages pertinents	no. des revendications visées
A	US 2 568 504 A (W.F. LUDWIG) 18 septembre 1951 (1951-09-18) abrégé colonne 2, ligne 22 - colonne 3, ligne 50 colonne 4, ligne 20 - ligne 37 ---	1
A	US 4 630 521 A (ALLETTO DARRO F) 23 décembre 1986 (1986-12-23) abrégé figures 1,6 colonne 2, ligne 10 - ligne 35 ---	1
A	US 2 564 933 A (J. SOMMERVILLE) 21 août 1951 (1951-08-21) colonne 1, ligne 25 - colonne 2, ligne 5 ---	1



Voir la suite du cadre C pour la fin de la liste des documents



Les documents de familles de brevets sont indiqués en annexe

* Catégories spéciales de documents cités:

- *A* document définissant l'état général de la technique, non considéré comme particulièrement pertinent
- *E* document antérieur, mais publié à la date de dépôt international ou après cette date
- *L* document pouvant jeter un doute sur une revendication de priorité ou cité pour déterminer la date de publication d'une autre citation ou pour une raison spéciale (telle qu'indiquée)
- *O* document se référant à une divulgation orale, à un usage, à une exposition ou tous autres moyens
- *P* document publié avant la date de dépôt international, mais postérieurement à la date de priorité revendiquée

T document ultérieur publié après la date de dépôt international ou la date de priorité et n'appartenant pas à l'état de la technique pertinent, mais cité pour comprendre le principe ou la théorie constituant la base de l'invention

X document particulièrement pertinent; l'invention revendiquée ne peut être considérée comme nouvelle ou comme impliquant une activité inventive par rapport au document considéré isolément

Y document particulièrement pertinent; l'invention revendiquée ne peut être considérée comme impliquant une activité inventive lorsque le document est associé à un ou plusieurs autres documents de même nature, cette combinaison étant évidente pour une personne du métier

& document qui fait partie de la même famille de brevets

Date à laquelle la recherche internationale a été effectivement achevée

11 juillet 2001

Date d'expédition du présent rapport de recherche internationale

18/07/2001

Nom et adresse postale de l'administration chargée de la recherche internationale
Office Européen des Brevets, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Fonctionnaire autorisé

de Heering, Ph.

RAPPORT DE RECHERCHE INTERNATIONALE

Demande Internationale No
PCT/FR 01/00720

C.(suite) DOCUMENTS CONSIDERES COMME PERTINENTS

Catégorie	Identification des documents cités, avec, le cas échéant, l'indication des passages pertinents	no. des revendications visées
A	DE 407 916 C (HANS ANHEIER) 7 janvier 1925 (1925-01-07) revendication 1; figure 1 ---	
A	US 4 154 136 A (MCINTYRE RODNEY A) 15 mai 1979 (1979-05-15) abrégé figures 3,4 colonne 2, ligne 20 - colonne 3, ligne 5 colonne 3, ligne 53 - ligne 58 ----	1
A	GB 815 297 A (H.W.TAYLOR) 24 juin 1959 (1959-06-24) page 1, ligne 53 -----	1

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/FR 01/00720

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2568504	A 18-09-1951	NONE	
US 4630521	A 23-12-1986	NONE	
US 2564933	A 21-08-1951	NONE	
DE 407916	C	NONE	
US 4154136	A 15-05-1979	NONE	
GB 815297	A 24-06-1959	NONE	

PATENT COOPERATION TREATY

09/08/9306

PCT

NOTIFICATION OF THE RECORDING
OF A CHANGE(PCT Rule 92bis.1 and
Administrative Instructions, Section 422)

From the INTERNATIONAL BUREAU

To:

ORIGIN LIMITED
52 Muswell Hill Road
London N10 3JR
ROYAUME-UNI

Date of mailing (day/month/year) 31 August 2001 (31.08.01)

Applicant's or agent's file reference Pop Out Radio	IMPORTANT NOTIFICATION
--	-------------------------------

International application No. PCT/GB00/04339	International filing date (day/month/year) 15 November 2000 (15.11.00)
---	---

1. The following indications appeared on record concerning: <input checked="" type="checkbox"/> the applicant <input checked="" type="checkbox"/> the inventor <input type="checkbox"/> the agent <input type="checkbox"/> the common representative				
Name and Address	State of Nationality		State of Residence	
	Telephone No.			
	Facsimile No.			
Teleprinter No.				

2. The International Bureau hereby notifies the applicant that the following change has been recorded concerning: <input type="checkbox"/> the person <input type="checkbox"/> the name <input type="checkbox"/> the address <input type="checkbox"/> the nationality <input type="checkbox"/> the residence				
Name and Address HORAN, Richard, J. 246 Beach 127th Street Belle Harbor, NY 11694 United States of America	State of Nationality		State of Residence	
	GB		US	
	Telephone No.			
	Facsimile No.			
Teleprinter No.				

3. Further observations, if necessary: Additional applicant/inventor for the purposes of US only.				
---	--	--	--	--

4. A copy of this notification has been sent to: <input checked="" type="checkbox"/> the receiving Office <input checked="" type="checkbox"/> the designated Offices concerned <input checked="" type="checkbox"/> the International Searching Authority <input type="checkbox"/> the elected Offices concerned <input type="checkbox"/> the International Preliminary Examining Authority <input type="checkbox"/> other:				
---	--	--	--	--

The International Bureau of WIPO 34, chemin des Colombettes 1211 Geneva 20, Switzerland Facsimile No.: (41-22) 740.14.35	Authorized officer Dominique DELMAS Telephone No.: (41-22) 338.83.38
---	--

PATENT COOPERATION TREATY

PCT

NOTICE INFORMING THE APPLICANT OF THE COMMUNICATION OF THE INTERNATIONAL APPLICATION TO THE DESIGNATED OFFICES

(PCT Rule 47.1(c), first sentence)

Date of mailing (day/month/year) 25 May 2001 (25.05.01)	DATE RECEIVED <i>1 June 2001</i>
Applicant's or agent's file reference Pop Out Radio	DEADLINE ENTERED
International application No. PCT/GB00/04339	COMMENT IMPORTANT NOTICE
International filing date (day/month/year) 15 November 2000 (15.11.00)	Priority date (day/month/year) 15 November 1999 (15.11.99)
Applicant PSION CONNECT LIMITED et al	

1. Notice is hereby given that the International Bureau has communicated, as provided in Article 20, the international application to the following designated Offices on the date indicated above as the date of mailing of this Notice:

US

In accordance with Rule 47.1(c), third sentence, those Offices will accept the present Notice as conclusive evidence that the communication of the international application has duly taken place on the date of mailing indicated above and no copy of the international application is required to be furnished by the applicant to the designated Office(s).

2. The following designated Offices have waived the requirement for such a communication at this time:
CN,EP,GB,JP

The communication will be made to those Offices only upon their request. Furthermore, those Offices do not require the applicant to furnish a copy of the international application (Rule 49.1(a-bis)).

3. Enclosed with this Notice is a copy of the international application as published by the International Bureau on 25 May 2001 (25.05.01) under No. WO 01/37437

REMINDER REGARDING CHAPTER II (Article 31(2)(a) and Rule 54.2)

If the applicant wishes to postpone entry into the national phase until 30 months (or later in some Offices) from the priority date, a demand for international preliminary examination must be filed with the competent International Preliminary Examining Authority before the expiration of 18 months from the priority date.

It is the applicant's sole responsibility to monitor the 19-month time limit.

Note that only an applicant who is a national or resident of a PCT Contracting State which is bound by Chapter II has the right to file a demand for international preliminary examination.

REMINDER REGARDING ENTRY INTO THE NATIONAL PHASE (Article 22 or 39(1))

If the applicant wishes to proceed with the international application in the national phase, he must, within 20 months or 30 months, or later in some Offices, perform the acts referred to therein before each designated or elected Office.

For further important information on the time limits and acts to be performed for entering the national phase, see the Annex to Form PCT/IB/301 (Notification of Receipt of Record Copy) and Volume II of the PCT Applicant's Guide.

The International Bureau of WIPO 34, chemin des Colombettes 1211 Geneva 20, Switzerland Facsimile No. (41-22) 740.14.35	Authorized officer J. Zahra Telephone No. (41-22) 338.83.38
--	---

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
25 May 2001 (25.05.2001)

PCT

(10) International Publication Number
WO 01/37437 A2

(51) International Patent Classification⁷: H04B 1/00

[GB/GB]; West Wing, Sandhill House, Middle Claydon,
Bucks MK18 2LD (GB).

(21) International Application Number: PCT/GB00/04339

(74) Agent: ORIGIN LIMITED; 52 Muswell Hill Road, London N10 3JR (GB).

(22) International Filing Date:
15 November 2000 (15.11.2000)

(25) Filing Language:

English

(81) Designated States (*national*): CN, GB, JP, US.

(26) Publication Language:

English

(84) Designated States (*regional*): European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR).

(30) Priority Data:
9926984.7 15 November 1999 (15.11.1999) GB
0000783.1 14 January 2000 (14.01.2000) GB

Published:

— Without international search report and to be republished upon receipt of that report.


(71) Applicant (*for all designated States except US*): PSION CONNECT LIMITED [GB/GB]; Presley Way, Crownhill, Milton Keynes MK8 0EF (GB).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(72) Inventor; and

(75) Inventor/Applicant (*for US only*): WOLOVITZ, Lionel

(54) Title: REMOVABLE WIRELESS DEVICE

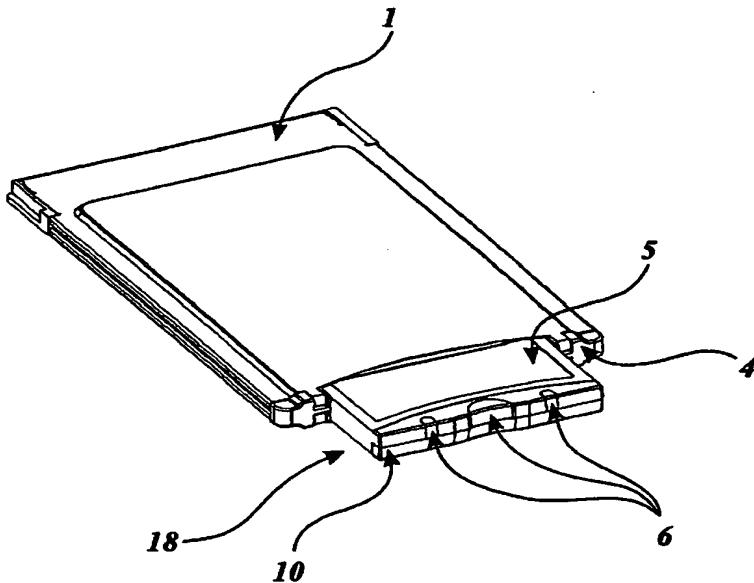

WO 01/37437 A2

(57) Abstract: A PC Card includes a slide out antenna platform on which is also mounted at least one component, such as a baseband processor, which can perform digital processes. Placing the component(s) which perform(s) digital processes next to the antenna removes the need for a flexible and expensive connection which would be required if, for example, the platform included solely HF components. When the platform partly slides out of the PC Card casing, it automatically turns the device on; sliding the platform back in automatically turns the device off. The platform can also be fully removed from the PC Card for replacement with an upgrade.

Removable Wireless Device

5 Field of the Invention

This invention relates to a removable wireless device which can be readily inserted into and entirely removed from a computing device. The term 'wireless device' used in this specification refers to any electronic device which includes a wireless reception and/or transmission capability, irrespective of whether or not other (e.g. wire based) forms of communications capabilities are also supported. Applicable wireless formats include, without limitation, the Bluetooth and 802.11 short range radio standards.

15 Prior Art Description

Providing a conventional notebook computer with wireless communications capabilities can be done in several ways, including for example, the use of a GSM PC Card inserted into the PC Card bay of the notebook computer. One design constraint affecting wireless devices is that an antenna generally has to protrude significantly from the wireless device casing, since that casing is usually metal and would therefore screen incoming and outgoing radiation. Hence, an antenna formed on a PC Card also has to extend significantly from the metal casing of the PC Card when in use.

25 This has led to three kinds of commercially manufactured antenna designs for wireless devices: first, antennas which are permanently connected to their associated radio receiver/transmitter hardware but are hinged and can fold out of a casing for use. An example of this would be a PC Card with a small hinged antenna which is hinged flush with the top of the PC Card when not in use, so that the antenna extends only slightly from the 30 casing of the notebook computer into which the PC Card is inserted. FM radios typically

also use a hinged, telescopically extensible antenna. When wireless communications are required, the antenna can be hinged outwards and extended as required.

A second kind of design is an antenna which is removable when not in use but which can be
5 readily connected for use. An example would be a clip-on antenna for a PC Card offering wireless capabilities: a small antenna connects to the PC Card body via a high quality electrical connector.

The third kind of antenna is the permanently fixed antenna, for example the stub antenna as
10 commonly found on mobile telephones.

These approaches all have disadvantages: the hinges of hinged antenna can often be readily damaged; removable antenna can be too readily lost and permanently fixed antennas are susceptible to damage. Another disadvantage with conventional designs is that the electrical
15 connectors leading from the antenna to the radio receiver/transmitter circuitry have to carry radio frequency signals with high integrity and are therefore relatively expensive, high quality components.

One solution which partly addresses some of these drawbacks is to include the antenna on a
20 platform which can slide out of a PC Card casing. Because the antenna is mounted on a retractable platform, it is both robust when extracted, cannot be lost and may also be fully retractable within the casing when not in use. Reference may be made to US 5918163 and EP 0936694. In these designs, the circuitry which processes digital signals (e.g. including the baseband processor) is not included on the platform which can slide out, but is instead
25 mounted on a PCB fixed inside the PC Card casing. Hence, this art explicitly teaches placing analogue components alone on the slide out platform.

Reference may also be made to US 5557288, which shows an antenna with associated analogue circuitry mounted on a platform which can be slid out of a portable computer casing. The antenna platform disclosed in this patent is not however entirely removable as such from the casing: instead it can merely slide out a short distance. This art therefore
5 relates not to a PC Card type system which can readily be slotted into and withdrawn from a standard bay, but instead to a permanent, fixed structure in a computer. This art also explicitly teaches placing only analogue circuitry on the slide out platform, although the precise function performed by this circuitry is not made explicit.

10 The requirement to provide wireless communications capabilities to electronic devices will become increasingly important as wireless communications becomes ever more pervasive. For example, recent developments in technology, such as the 802.11 and Bluetooth standards for short range radio, offer the possibility of connecting devices such as PDAs and laptop computers into Pico nets or local areas networks; Bluetooth and 802.11 enabled
15 computers and peripherals will likely become popular wireless devices, able to transmit and receive wireless data with other compatible equipment, such as other computers and peripherals. Antennas and radio transceivers which can work with 802.11 and Bluetooth signals require high integrity electrical connections, so that the conventional solutions would be particularly expensive because of the required high quality of the components.

20

Summary of the Present Invention

In a first aspect of the invention, there is provided a removable wireless device which is
25 adapted to be insertable and fully removable from a computing device, the wireless device comprising:

- (i) an antenna;
- (ii) an analogue radio amplifier connected to the antenna;

(iii) a platform on which the antenna and radio amplifier are mounted, the platform being retractable into a casing of the device when the antenna is not in use and extendable out of the casing to enable the antenna to operate effectively;

5 wherein the device further comprises one or more components, mounted on the platform, which perform a digital process.

By placing at least some of the circuitry which applies digital processes on the movable platform itself, significant manufacturing advantages can be obtained. For example, where 10 the components perform digital processes such as signal detection or digital demodulation, then placing the components on a platform shared with the analogue radio amplifier (and generally also the radio transceiver) leads to the expensive co-axial connections otherwise needed to bring a radio signal to a radio transceiver placed in the body of the PC Card being entirely eliminated. More generally, the component mounted on the platform may perform 15 one or more of the following digital processes:

- (i) D/A conversion;
- (ii) Signal filtering;
- (iii) Modulation or demodulation;
- (iv) Channel coding or de-coding;
- 20 (v) Generating an analogue baseband signal;
- (vi) Generating a digitised version of an analogue baseband signal.

The component may be a baseband processor and/or a radio transceiver.

25 The term 'computing device' used in this patent specification should be expansively construed to cover any form of data handling device, including without limitation a portable computer, desktop computer, communications device, mobile telephone, desktop phone, smart phone or communicator.

The platform may be a printed circuit board. The platform need not be a single unitary piece: the only requirement is for the part of the platform on which the antenna is attached to be fixed relative to the part of the platform on which the circuitry handling at least some digital signal processes is mounted. An advantage of mounting the antenna on a PCB shared with the related analogue transceiving circuitry and also at least some of the circuitry which can process or handle digital signals is that the required electrical connections can for example be a simple rigid connection such as a connection printed directly onto the printed circuit board.

5

10 The baseband processor is typically connected via a data connector interface to the computing device via cheap and robust fixed tracks. No high integrity cabling needed to carry a wireless signal is therefore required at all in such an implementation. In one implementation, several chips (typically a physical interface, a baseband processor, a MAC (Media Access Controller) and RAM are all mounted on the retractable platform. Simple
15 and relatively cheap fixed tracks or ribbon connectors then connect the MAC to a standard 68 way PCMCIA connector at the rear face of the card.

In a preferred embodiment, the platform slides within a PC Card casing conforming for example to a PCMCIA standard. The term 'PC Card' as used in this specification refers to
20 any kind of small computer peripheral which can be placed into electrical engagement with a computer to provide directly or indirectly additional resources or functions for that computer or enable another connected device to use resources or functions of that computer. It includes cards such as PCMCIA cards, and CompactFlash (CF) cards, which are widely used with many different kinds of computer and offer a vast range of
25 functionality, including voice and data communications, and memory expansion. PC Cards conform to precise physical and performance constraints and typically slot into a standard sized bay in a computer host.

Since PCMCIA card slots are so common in notebook and laptop PCs, this is a particularly convenient implementation since it means that a fully functional wireless radio device, for example a wireless LAN 802.11 or Bluetooth device, can be fitted to a wide range of computing devices. Conventional wireless LAN antennas are somewhat delicate and readily
5 broken, so that the robust solution offered by this embodiment is an attractive one.

The card may slide out under the force of a spring ejection mechanism, have a motorised ejector or be merely pulled out manually.

In accordance with a second aspect of the present invention there is provided a removable
10 wireless device which is adapted to be insertable and fully removable from a computing device, the wireless device comprising:

- (i) an antenna;
- (ii) an analogue radio amplifier connected to the antenna ;
- (iii) a platform on which the antenna and amplifier are mounted, the platform
15 being retractable into a casing of the device when the antenna is not in use and extendable out of the casing to enable the antenna to operate effectively;

wherein the device further comprises a sensor which detects the position of the platform and automatically switches the wireless device on if the platform is extended beyond a first
20 position and automatically switches the wireless device off if the platform is retracted beyond a second position.

Hence, this second aspect envisages a wireless device, which may be a PC Card format device, which automatically switches itself on and off depending on a sensed location of the
25 extension of the antenna. Advantages of this approach are that (i) it does not require any software application to switch on/off the radio and (ii) the status of the radio is immediately visible to a user.

In accordance with a third aspect of the present invention, there is provided a PC Card including a removable platform on which is mounted at least one component, the platform being removable from the PC Card to allow replacement by a platform on which is mounted a replacement or upgraded component by sliding the platform out of an aperture on the PC
5 Card.

Hence, this third aspect of the present invention is based on the fact that the PC Card can readily operate as a host or base for one or more components which provide important functionality or features for the computer to which the PC Card is itself connected. For
10 example, as noted above, a PC Card could include a Bluetooth antenna and radio module as the removable component. Digital signal processing circuitry and memory might reside permanently in the PC Card or also be removable, depending on the economics of each option. When the requirement for a different or upgraded antenna and/or radio module arises, a user need only swap the replaceable, removable component with the upgraded
15 antenna and/or radio module. This will be significantly cheaper for the consumer than replacing the entire PC Card. Many other different kinds of components could be included in a PC Card and therefore upgraded in this way.

A modular system of different removable components may be available: Having a PC Card
20 with a standard aperture able to receive one of many different kinds of removable components, can significantly reduce manufacturing costs.

In a fourth aspect, there is a method of manufacturing a PC Card comprising the steps of:

- (a) mounting a removable component on a platform, the platform being removable from the PC Card by a user to allow replacement by a replacement or upgraded component;
- (b) sliding the platform into an aperture of the PC Card to engage with an electrical connector in the PC Card.

In a fifth aspect, there is a method of upgrading the functionality of a PC Card comprising the following steps:

5 (a) removing a component from the PC Card by sliding a platform on which that component is mounted out of an opening in the PC Card;

(b) taking an upgraded component mounted on a further platform and sliding that further platform into the opening in the PC Card.

Further details of each aspect are stated in the appended claims.

10

Brief Description of the Drawings

The invention will be described with reference to the accompanying drawings, in which:

15 Figure 1 is an exploded perspective view of a PC Card implementation of the present invention with a radio transceiver and baseband processor modules and an antenna mounted on a platform retractable within the PC Card;

Figure 2 is a perspective internal view of the PC Card implementation with the platform fully extended;

20 Figure 3 is a perspective internal view of the PC Card implementation with the platform fully retracted;

Figure 4 is a perspective internal view of the PC Card implementation with the platform extended and showing the components fixed within the PC Card casing;

Figure 5 is a perspective internal view of the PC Card implementation with the platform retracted and showing the components fixed within the PC Card casing;

25 Figure 6 is a perspective external view of the PC Card implementation with the platform extended;

Figure 7 is a perspective external view of the PC Card implementation with the platform extended;

Figure 8 is a perspective external view of part of the PC Card implementation showing a part which prevents the platform from being readily fully retracted;

5 Figure 9 is a perspective external view of part of the PC Card implementation showing a part which prevents the platform from being readily fully retracted;

Figure 10 is a perspective view of connector tracks used in the PC Card implementation;

Figure 11 is a schematic of the electronic components used in the PC Card.

10

Detailed Description

The detailed implementation shown in the attached figures is a PCMCIA format card which
15 includes a 802.11 antenna, radio transceiver and baseband processor, all mounted on a platform which can slide in and out of the card casing. The card itself can be inserted into a standard PC Card bay in a laptop computer to give 802.11 standard short range radio connectivity for data transfer.

20 Referring now to **Figure 1**, the PC Card comprises a top metal cover 1 and a bottom metal cover 11, which provide electromagnetic screening to the electrical components positioned within them. A plastic frame 4 sits between the two metal covers 1 and 11; a fixed PCB 2 is positioned on frame 4 and includes at one end a standard PCMCIA 68 way connector 12, which in use electrically connects the PC Card to the lap top computer (not shown). A
25 grounding clip 3 is positioned on frame 4 such that when the PC Card is in use, it electrically contacts a grounded portion of the PCB 2 and also the top and bottom metal covers 1 and 11, thereby grounding each of those covers 1 and 11.

A radio transceiver PCB 9 is a platform which is arranged to slide in and out of frame 4 approximately 10mm, as shown more clearly in Figures 2 and 3. Radio transceiver PCB 9 has mounted upon it a radio transceiver unit 13; an inverted F antenna 14 and three LEDS 8 which indicate the functioning of the PC Card. Radio transceiver unit 13 is a Bluetooth radio
5 chip such as the BlueCore01 from Cambridge Silicon radio. Many other vendors also supply Bluetooth radio chips; further information can be found at the Bluetooth.com web site. The Bluetooth radio is a digital radio operating at 2.4GHz. Figures 2 and 3 show respectively the assembled PC Card with the top cover 1 removed and the combined antenna/radio transceiver platform 9 fully extended and fully retracted. As can be seen, with
10 the platform 9 fully extended, antenna 14 fully protrudes from the card, clear of the shielding offered by the metal covers.

Additional signal processing components are also mounted on the radio transceiver PCB 9, including a baseband processor and RAM. In some implementations, a single component
15 including several discrete chips (e.g. RF transceiver, Baseband and link manager) may be useful. The Bluemoon component from Infineon AG is one such example. A top radio cover 5 and bottom radio cover 10 is positioned around the end of the radio transceiver PCB 9 which in use may extend out of the PC Card.

20 Inverted F antenna 14 is a slim and cheap form of printed antenna and is therefore very suitable for a slim, low cost product such as a 802.11 or Bluetooth PC Card. Antenna 14 is positioned at the outer edge of the radio transceiver PCB 9 so that it extends substantially from the top and bottom metal covers 1 and 11 when the platform, i.e. the radio transceiver
25 PCB 9, is fully extended, as shown in Figures 2 and 7. LEDS 8 need to be visible at the front face of the radio transceiver PCB 9 but cannot overlie the antenna 14 since they and their leads would interfere with radio reception and transmission; LEDS 8 are therefore positioned back from the front face, but a light pipe 6 feeds light from them to the front face, as more clearly shown in Figures 2 and 3. LED(s) 8 are used in the antenna module to

indicate the status or condition of the device, for example the received signal strength, link status, and data flow. The LEDs 8 can be modulated in intensity (for example the stronger the received signal, the brighter the LED), or on/off duty cycle (for example the stronger the received signal, the more rapidly the LED blinks, or is on for longer). The LEDs 8 can for 5 example pulse on for a short period each time a specified amount of data is transmitted or received. The user may specify which status each LED indicates and the means by which this is indicated. A combination of LEDs or multi-colour LED can be used to indicate status, for example colour could be varied from red, through orange to green could be used to indicated signal strength from none, weak through to strong.

10

A sliding connector 7 comprising a comb of eight metal fingers is positioned on the rear of the radio transceiver PCB 9; sliding connector 7 transfers digital signals to and from the signal processing circuitry on radio transceiver PCB 9, to the connector tracks 15, which are formed on the fixed PCB 2, as more clearly shown in Figures 4 and 5.

15

Figure 4 shows the PC Card from the rear; the holes of the PCMCIA 68 way connector 12 are clearly visible; these mate with pins located within the PC Card bay of the laptop computer (not shown). A PCMCIA interface chip 16, mounted on fixed PCB 2, is connected to 68 way connector 12 and receives digital signals passing along printed connector tracks 15 20 (and vice versa). Connector tracks 15 are in turn electrically connected to the 8 way sliding connector 7, as noted above.

As the platform 9 slides out of the PC Card, the 8 way sliding connector 7 slides along connector tracks 15, maintaining electrical contact. Electrical power to the radio transceiver 25 13 and other components on platform 9 passes through connector tracks 8 and sliding connector 7. Figure 10 shows the detail of one of the connector tracks 15 in more detail. A break 19 exists in one connector track; this enables a simple mechanism for sensing the position of the platform to be implemented as follows: different voltages are applied to the

track 15 on one side of the break 19 as compared to the other side of the break 19. The voltage picked up by the contacting comb of 8 way connector 7 will be different depending on which side of the break 19 it is positioned. Suitable signalling therefore enables the position of the platform 9 to be sensed so that when the platform is pulled out ready for 5 operation, the PC Card is automatically switched on; when the platform is pushed back in, then the appropriate power down process is automatically initiated. This is useful for quick disabling as may be required, for example, on or when entering an aeroplane. The switch off is properly designed so that all appropriate switch off protocols are followed – e.g. remotely connected devices know that the device is being turned off in a controlled manner. One 10 advantage of this approach is that it does not require any software application to switch on/off the radio and the status of the radio is immediately visible to a user.

When the antenna is to be used, it can be readily extended by the user gently pushing the front face of the radio covers 5 and 10. This causes a 1-way locking mechanism to be 15 disengaged, allowing a spring mounted on frame 4 to push platform 9 out. Small stops on the platform 9 ensure that it is not extended too far. When the user wishes to turn the wireless device off, then the user simply pushes platform 9 back into the PC Card casing and 1-way locking mechanism engages again.

20 **Upgradeability**

It is generally desirable to make computer products alterable or upgradeable to allow for changes in the applicable technical standards, or to add new or enhanced features. These “upgrades” can sometimes be implemented by updating the program memory associated with the micro-processor implementing the standard (or protocols). In some devices the 25 program memory consists of volatile RAM and is downloaded from a host computer each time the device is used. In others it consists of non-volatile memory, for example flash memory. This memory may be updated from the host computer. Some communications

products use program memory that does not facilitate upgrading, for example ROM (read-only memory).

A software upgrade may however sometimes be inapplicable. For example where radio circuitry designed for one standard is not able to conform to the different or higher data speed modulations of a new standard, then a product incorporating that radio circuitry can be rendered obsolete. Some limited forms of hardware upgradeability have been common in the computer field for many years; for example, RAM memory, hard drives and microprocessors can be swapped out and upgraded in many personal computers. However, engineering a product so that it is readily upgradeable can add significantly to the complexity of the product and hence its manufacturing cost. For many consumer electronics products, profit margins are already highly pressured, making it difficult to justify reducing the margins further by adding upgradeability features which may or may not be attractive to purchasers. The term 'upgraded component' denotes both a component with increased functionality and/or specification as well as a component with a merely different functionality and/or specification.

The present invention addresses this issue: When the slidable platform 9 is first mated into the PC Card frame 4 (typically during first manufacture or a user upgrade procedure), a simple sliding engagement is enough to cause an adequate electrical connection between connector comb 7 and connector tracks 15. Slidable platform 9 can be entirely withdrawn without any damage to the PC Card or the slidable platform 9. This is achieved as follows: a small spring feature 20 (shown in Figure 8) is present on the slidable platform 9. Feature 20 normally engages stop feature 21 (shown in Figure 9), positioned on frame 4, therefore preventing slidable platform 9 from being fully withdrawn from frame 4. However, a more forceful pull can cause the spring feature 20 to be pushed to one side, allowing the slidable platform 9 to be withdrawn past stop feature 21. A slidable platform 9 with upgraded

components (not shown) can then readily be slid into the frame 4, automatically engaging the connector tracks 15 when sufficiently inserted.

5 Signal Processing walk through

Figure 11 shows a simplified schematic of the main electronic components. As noted above, digital data is passed into a PCMCIA 68 way interface 12, controlled by PCMCIA interface 16. Digital data passes along fixed connector tracks 15 and is picked up by a siding connector 7 which is fixed to slidable platform 9. Slidable platform 9 has mounted on it a baseband processor 30 as well as a radio transceiver chip 13, feeding an antenna 14. The detailed operation of such a system will be appreciated by a skilled radio systems implementer and will therefore only be described in outline here. The typical transmit sequence is as follows: source digital data is received at the baseband processor from the laptop. At the baseband processor, the following functions are carried out: first, channel coding occurs. In this process, the source digital data is multiplexed with forward error correction and framing bits. The purpose is to add redundancy to the information content so that bit errors can be detected in the receiver. A channel bitstream is generated as a result of the channel coding process. Digital modulation then occurs; the channel bitstream is merged to the signal samples which will be transmitted over the 2.4GHz air link. In Bluetooth, the GFSK digital modulation process occurs. The resultant signal is pulse shape filtered and then converted to analogue in a D/A converter. The analogue signal is then upconverted to the required frequency range and amplified to the required transmit power. The amplified signal is then passed to the antenna for transmission. The reception process is in essence the inverse of the above process.

The kind of components used to perform the above sequence can vary from implementation to implementation. For example, a baseband processor can be used to perform all steps up

to and including the D\A conversion, including link control and management functions, leaving the radio transceiver to perform solely the analogue signal processing functions of upconversion and amplification. In other implementations, the radio transceiver chip can itself perform significant digital signal processing tasks, such as modulation/demodulation; 5 carry digital signals such as control logic signals (e.g. for controlling an amplifier); and perform digitally controlled power management tasks.

Claims

1. A removable wireless device which is adapted to be insertable and fully removable from a computing device, the wireless device comprising:
 - 5 (i) an antenna;
 - (ii) an analogue radio amplifier connected to the antenna ;
 - (iii) a platform on which the antenna and radio amplifier are mounted, the platform being retractable into a casing of the device when the antenna is not in use and extendable out of the casing to enable the antenna to operate effectively;

10 wherein the device further comprises one or more components, mounted on the platform, which perform a digital process.
2. The removable wireless device of Claim 1 in which a component mounted on the platform perform one or more of the following digital processes:
 - (i) D/A conversion;
 - (ii) Signal filtering;
 - (iii) Modulation or demodulation;
 - (iv) Channel coding or de-coding;
 - 20 (v) generating an analogue baseband signal;
 - (vi) generating a digitised version of an analogue baseband signal.
3. The removable wireless device of Claim 2 in which one or more of the following components are mounted on the platform:
 - 25 (i) a baseband processor;
 - (ii) a radio transceiver.

4. The removable wireless device of any preceding Claim in which the platform comprises a printed circuit board.
5. The removable wireless device of Claim 4 in which electrical connections between the antenna and the or each component mounted on the platform are printed directly onto the printed circuit board on which the components and the antenna are mounted.
6. The removable wireless device of any preceding Claim in which the antenna is printed directly onto the circuit board.
7. The removable wireless device of any preceding claim in which the platform slides within a PC Card casing.
- 15 8. The removable wireless device of any preceding Claim in which the platform may slide out under the force of a spring ejection mechanism, the force of a motorised ejector or be capable of being extracted manually.
9. The removable wireless device of any preceding Claim in which the device further comprises a sensor which detects the position of the platform and automatically switches the wireless device on if the platform is extended beyond a first position and automatically switches the wireless device off if the platform is retracted beyond a second position.
- 20 25 10. The removable wireless device of Claim 9 in which the sensor comprises a voltage sensing arrangement in which the voltage applied to a part of the platform varies depending on its position and the applied voltage can be measured to determine the position of the platform.

11. The removable wireless device as claimed in any preceding Claim further including LEDs which are controlled to light up indicating the status or condition of the Card.

5 12. The removable wireless device of Claim 11 in which the LEDs are mounted distant from the antenna in order to minimise interference with the antenna and at least one light pipe carries light from the LEDS.

10 13. The removable wireless device of any preceding Claim in which the platform is fully removable from the device to allow a new platform to be inserted into the device.

14. The removable wireless device of Claim 13 in which the removable platform enables an upgraded version of the platform to be inserted into the device.

15 15. A removable wireless device which is adapted to be insertable and fully removable from a computing device, the wireless device comprising:

(i) an antenna;
(ii) an analogue radio amplifier connected to the antenna;
(iii) a platform on which the antenna and amplifier are mounted, the platform being retractable into a casing of the device when the antenna is not in use and extendable out of the casing to enable the antenna to operate effectively;
20 wherein the device further comprises a sensor which detects the position of the platform and automatically switches the wireless device on if the platform is extended beyond a first position and automatically switches the wireless device off if the platform is retracted beyond a second position.

25 16. The removable wireless device of Claim 15 wherein the device further comprises one or more components mounted on the platform which perform digital processes.

17. The removable wireless device of Claim 15 or 16 in which a component mounted on the platform handles one or more of the following processes:

(i) D/A conversion;
5 (ii) Signal filtering;
(iii) Modulation or demodulation;
(iv) Channel coding or de-coding;
(v) generating an analogue baseband signal;
(vi) generating a digitised version of an analogue baseband signal.

10 18. The removable wireless device of Claim 17 in which one or more of the following components are mounted on the platform:

(i) a baseband processor;
15 (ii) a radio transceiver.

19. The removable wireless device of any preceding Claim 15 – 18 in which the platform comprises a printed circuit board.

20 20. The removable wireless device of any preceding Claim 15 – 19 in which electrical connections between the antenna and the or each component mounted on the platform are printed directly onto the printed circuit board on which the components and the antenna are mounted.

25 21. The removable wireless device of any preceding Claim 15 - 20 in which the antenna is printed directly onto the circuit board.

22. The removable wireless device of any preceding Claim 15 - 21 in which the platform slides within a PC Card casing.
23. The removable wireless device of any preceding Claim 15 - 22 in which the platform may slide out under the force of a spring ejection mechanism, the force of a motorised ejector or be capable of being extracted manually.
5
24. The removable wireless device of Claim 15 - 23 in which the sensor comprises a voltage sensing arrangement in which the voltage applied to a part of the platform varies depending on its position and the applied voltage can be measured to determine the position of the platform.
10
25. A PC Card including a removable platform on which is mounted at least one component, the platform being removable from the PC Card to allow replacement by a platform on which is mounted a replacement or upgraded component by sliding the platform out of an aperture on the PC Card.
15
26. The PC Card of Claim 25 in which the removable platform includes an antenna.
20
27. The PC Card of Claim 25 or 26 in which the removable platform includes a radio module.
25
28. The PC Card of any preceding Claim 25 – 27 in which the removable platform is readily disengageable from an electrical connector in the PC Card to allow a user to remove the platform from the PC Card.

29. The PC Card of any preceding Claim 25 – 28 in which the first removable platform forms is readily engageable with an electrical connector in the PC Card during assembly of the PC Card.
- 5 30. The PC Card of any preceding Claim 25 – 29 in which comb/track connectors or push fit electrical connectors are used to connect the removable platform with an interface in the PC Card to permanent PC Card components.
- 10 31. The PC Card of any preceding Claim 25 – 30 forming part of a modular system in which the PC Card includes a standard aperture able to receive platforms on which many different kinds of components can be mounted.
- 15 32. The PC Card of any preceding Claim 25 – 31 in which the one or more sides of the removable platform when fully inserted into a housing in the PC Card are flush with a surface of the PC Card.
33. A method of manufacturing a PC Card comprising the steps of:
 - (a) mounting a removable component on a platform, the platform being removable from the PC Card by a user to allow replacement by a replacement or upgraded component;
 - (b) sliding the platform into an aperture of the PC Card to engage with an electrical connector in the PC Card.
- 20 34. A method of upgrading the functionality of a PC Card comprising the following steps:
 - (a) removing a component from the PC Card by sliding a platform on which that component is mounted out of an opening in the PC Card;
- 25

- (b) taking an upgraded component mounted on a further platform and sliding that further platform into the opening in the PC Card.

35. The method of Claim 34 whereby the action of sliding the platform out of the PC Card automatically electrically disengages the component.

5

1/11

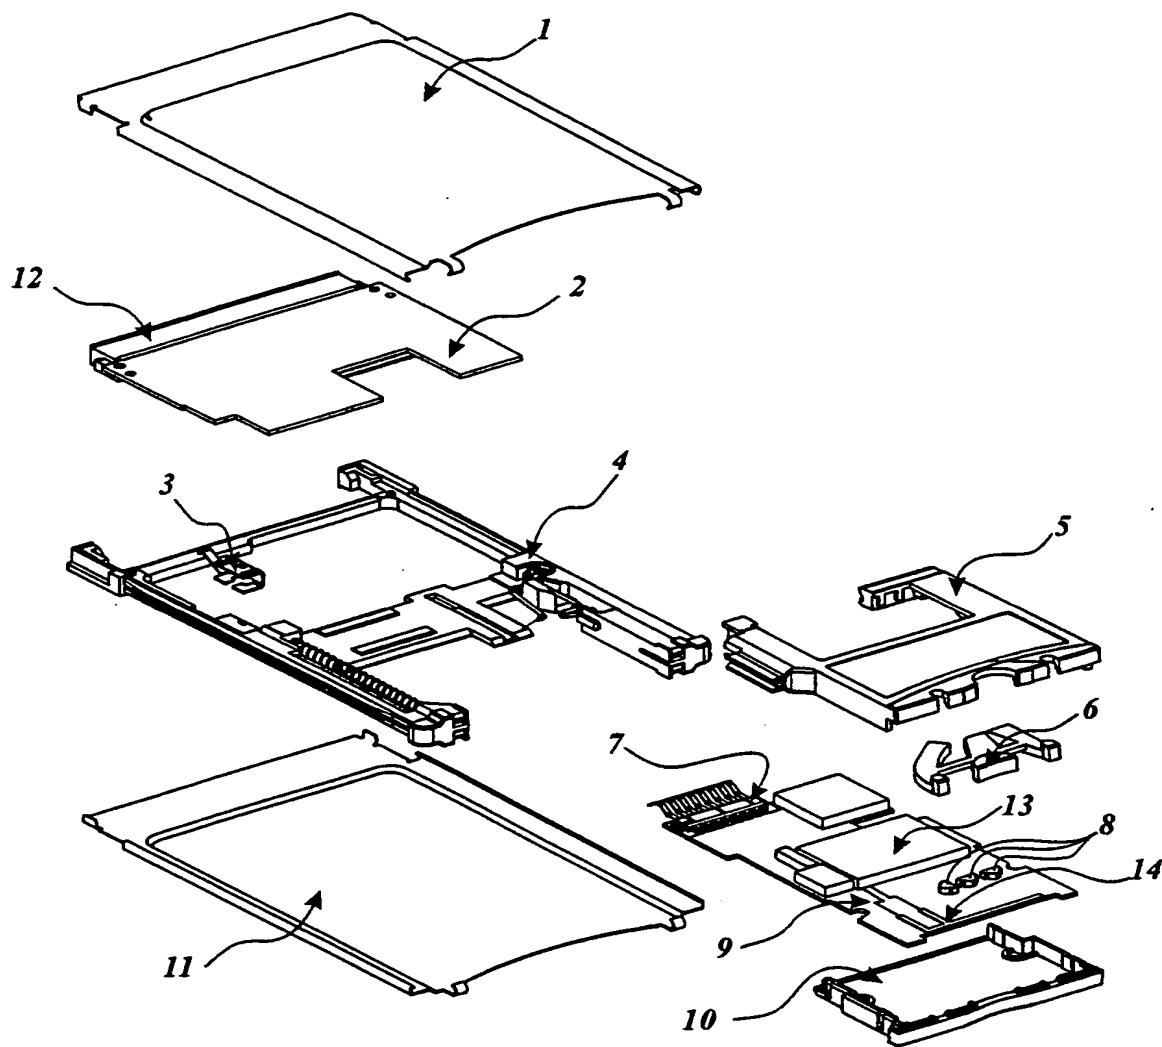


Fig. 1

2/11

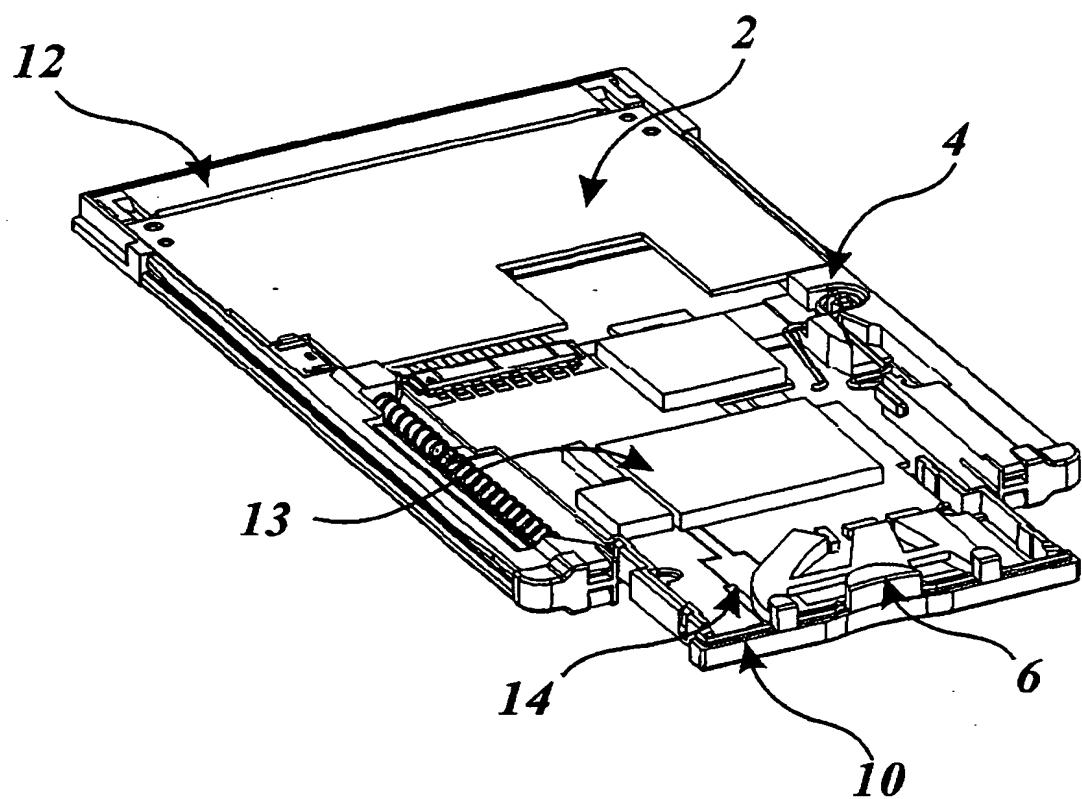


Fig. 2

3/11

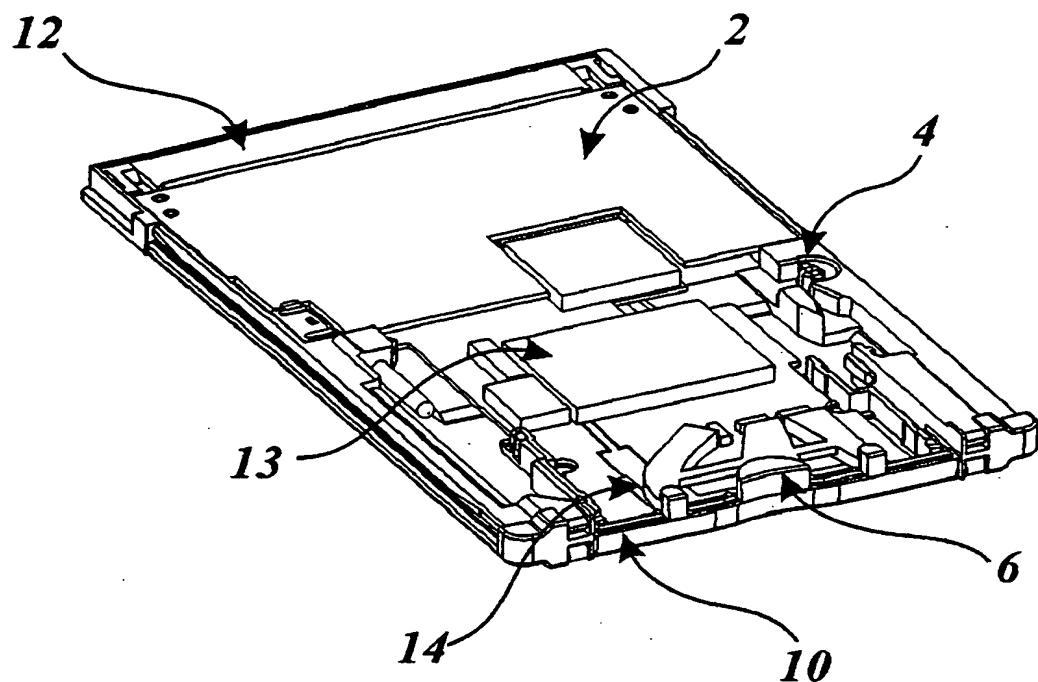


Fig. 3

4/11

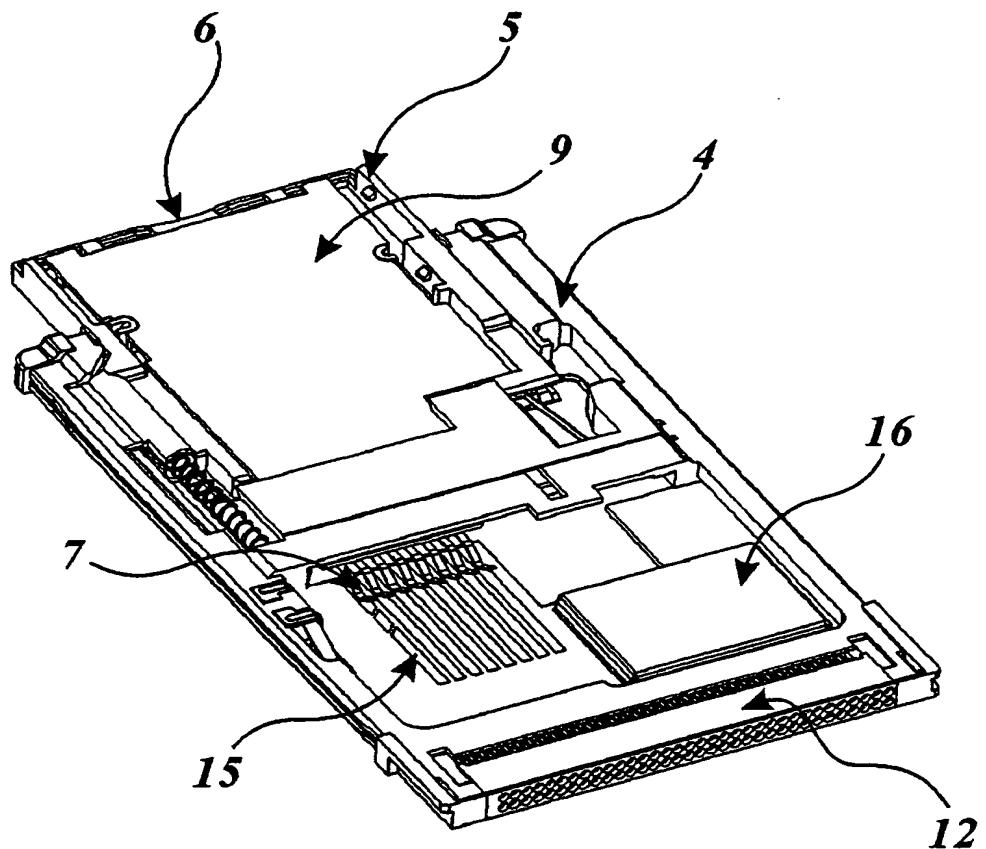


Fig. 4

5/11

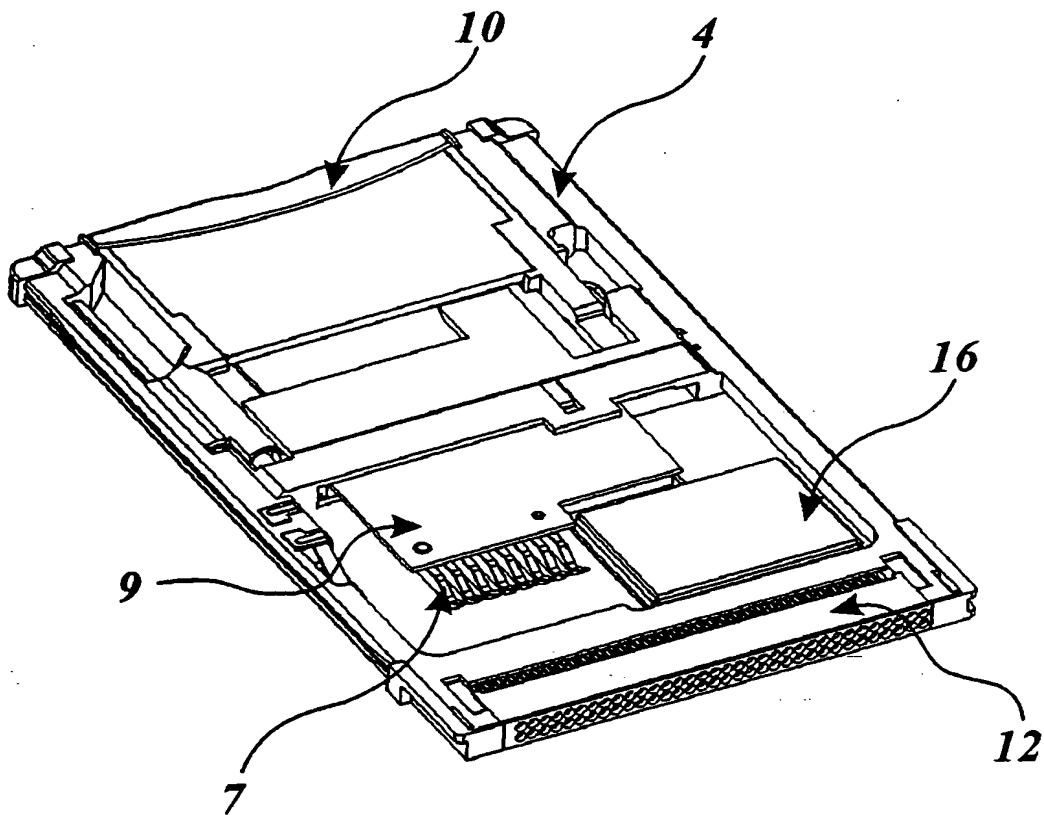


Fig. 5

6/11

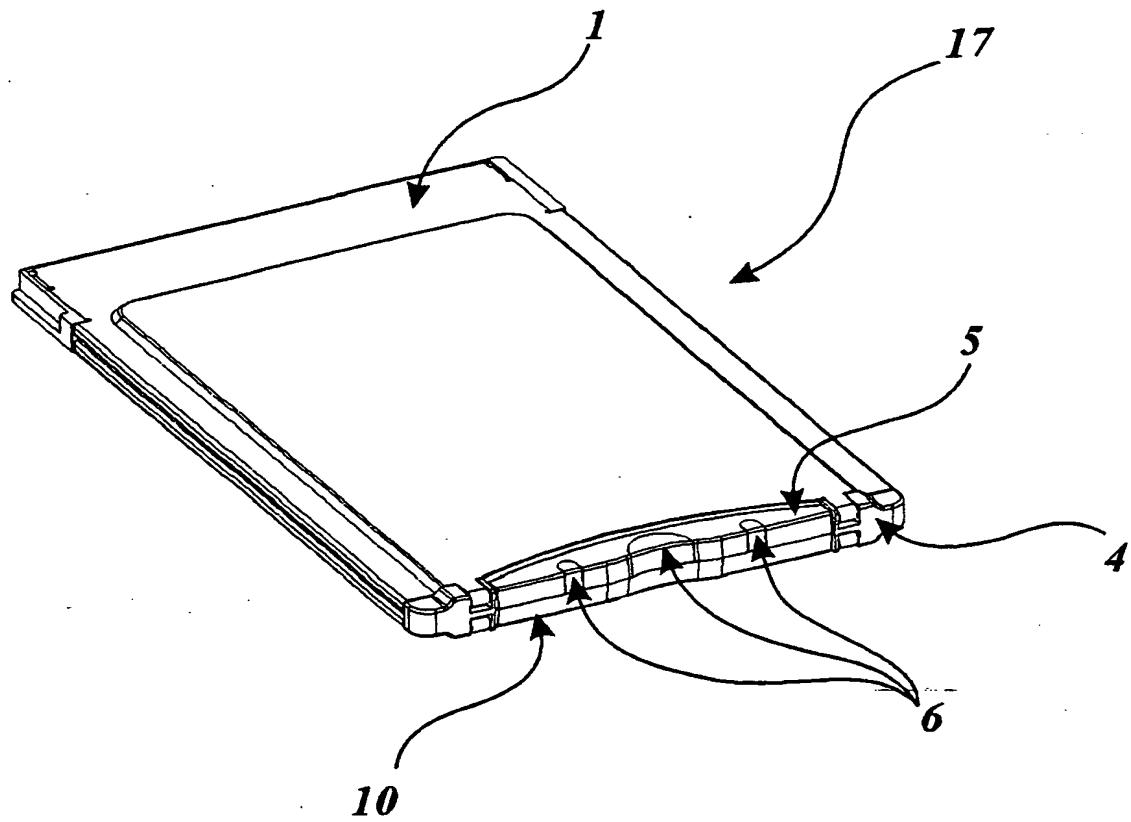


Fig. 6

7/11


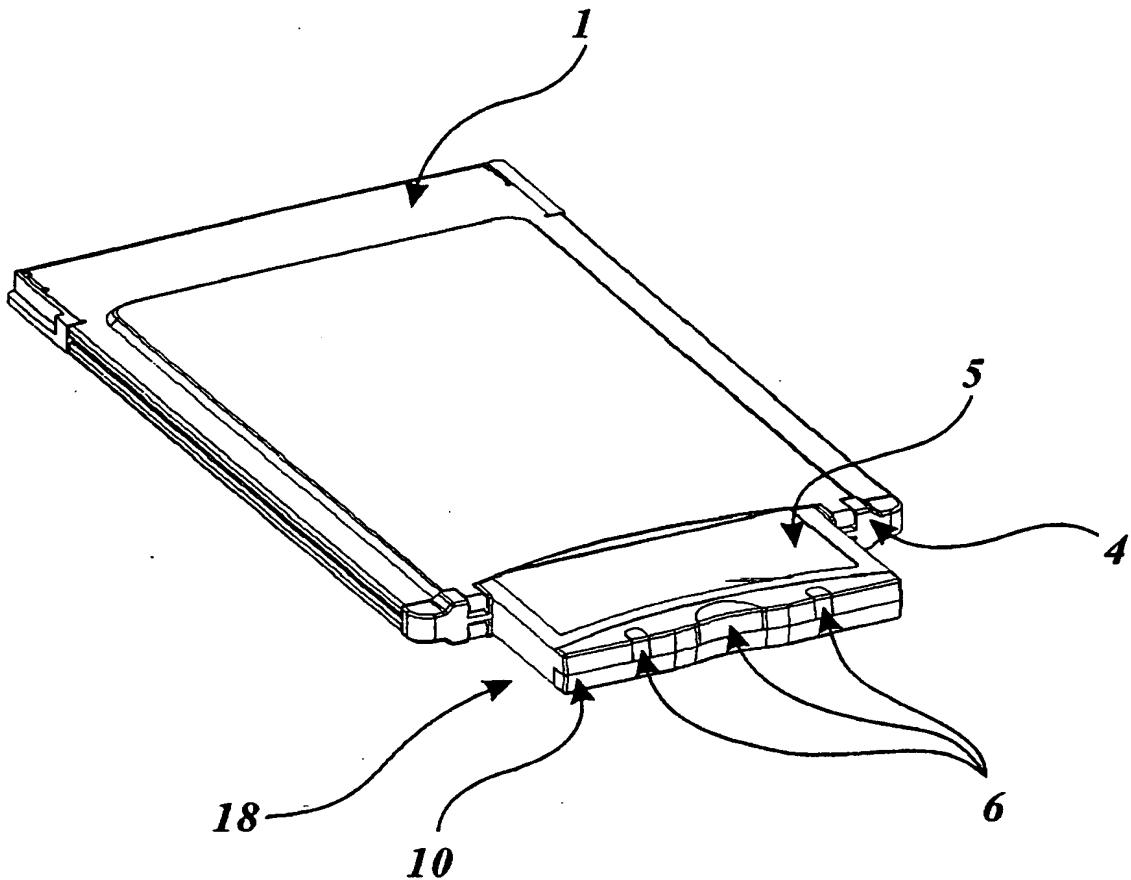


Fig. 7

8/11

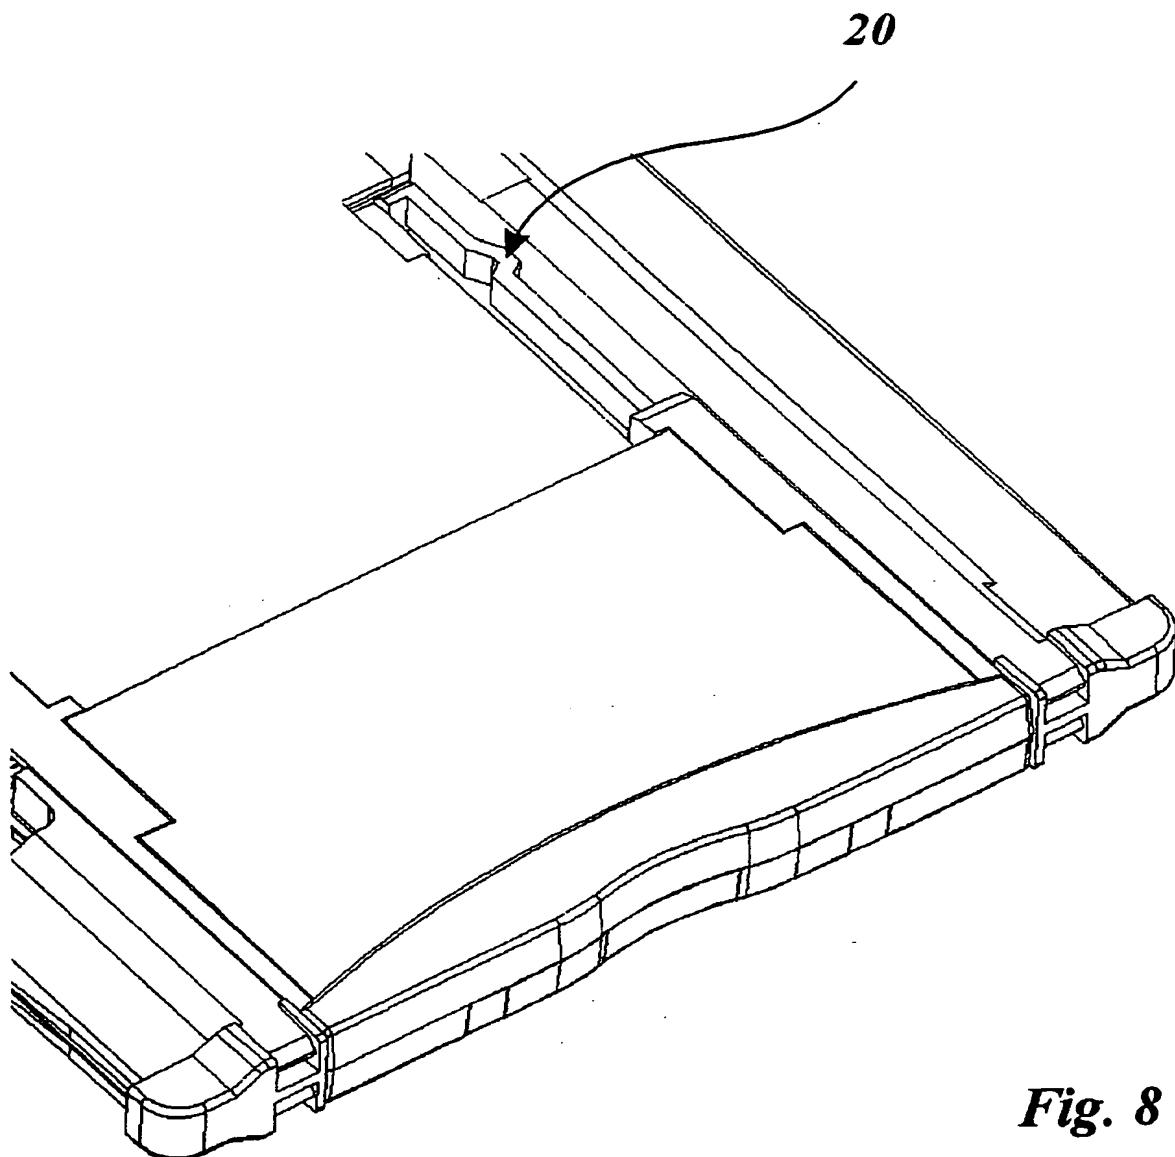

9/11

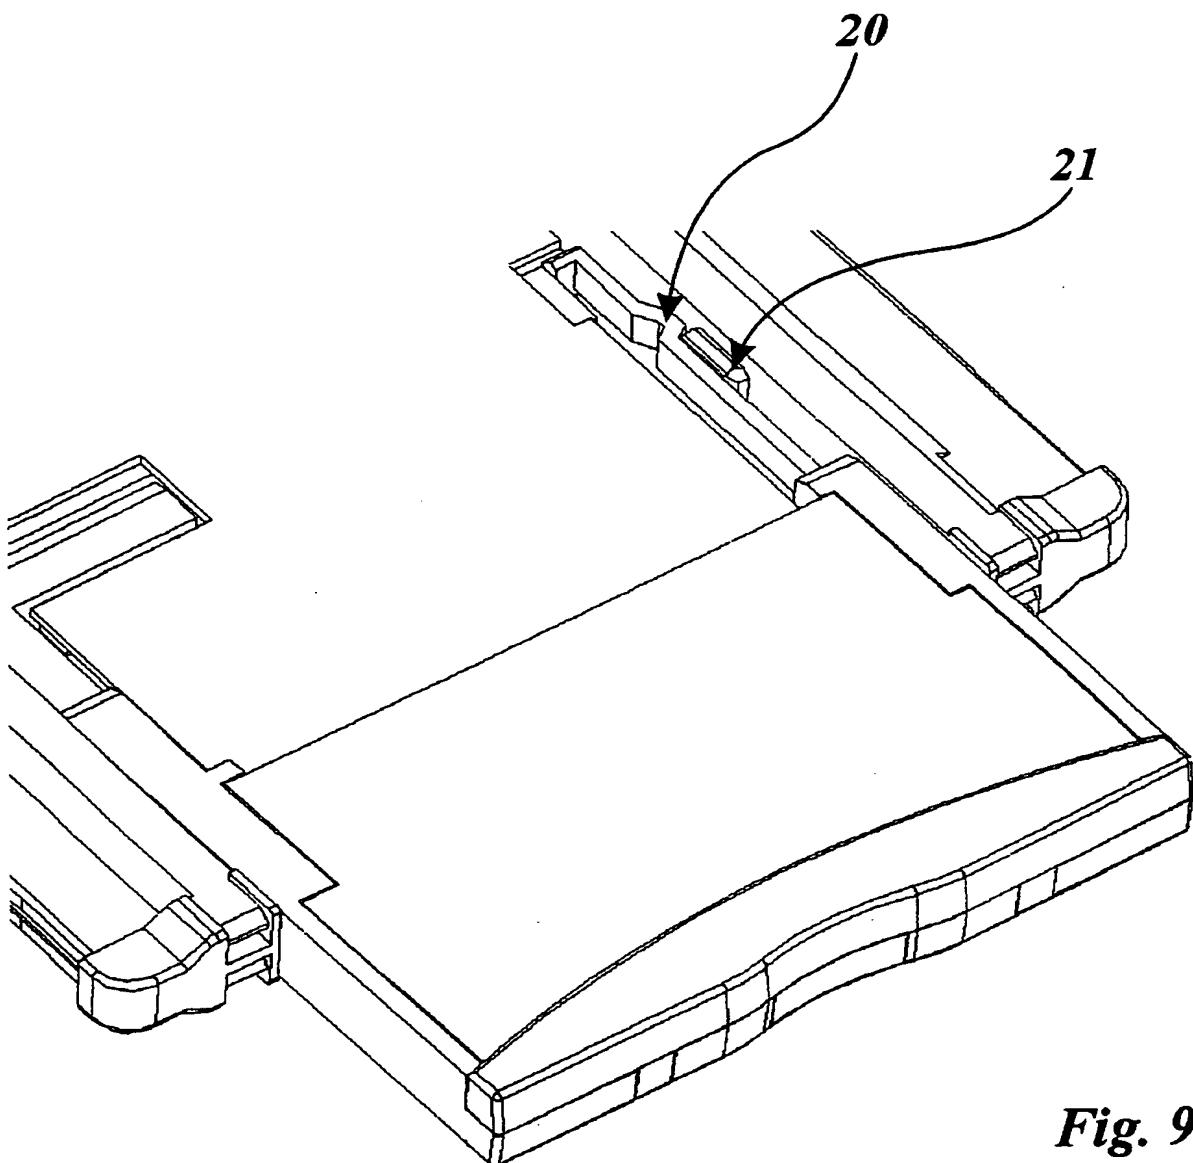


Fig. 9

10/11

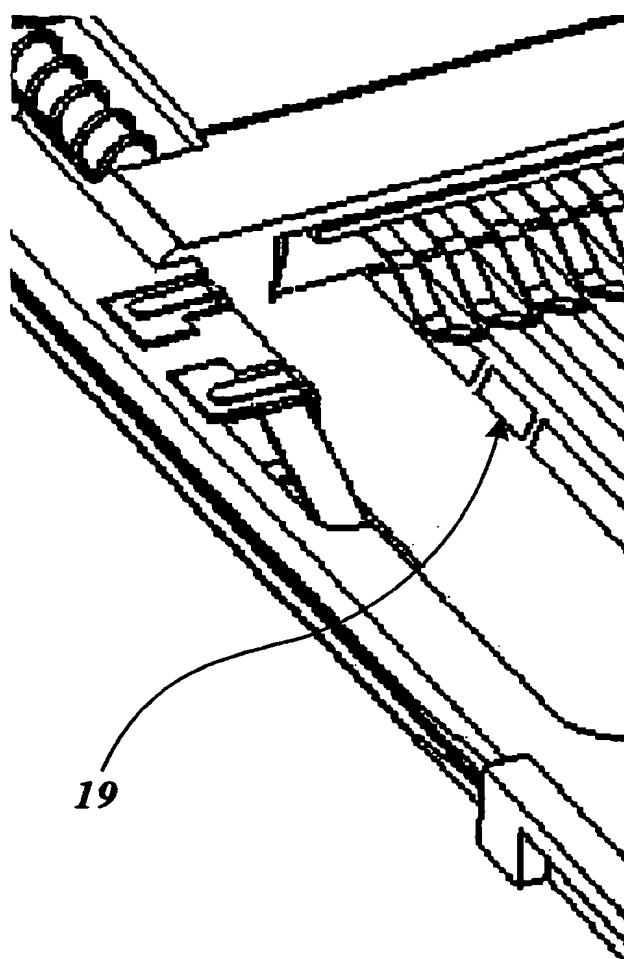
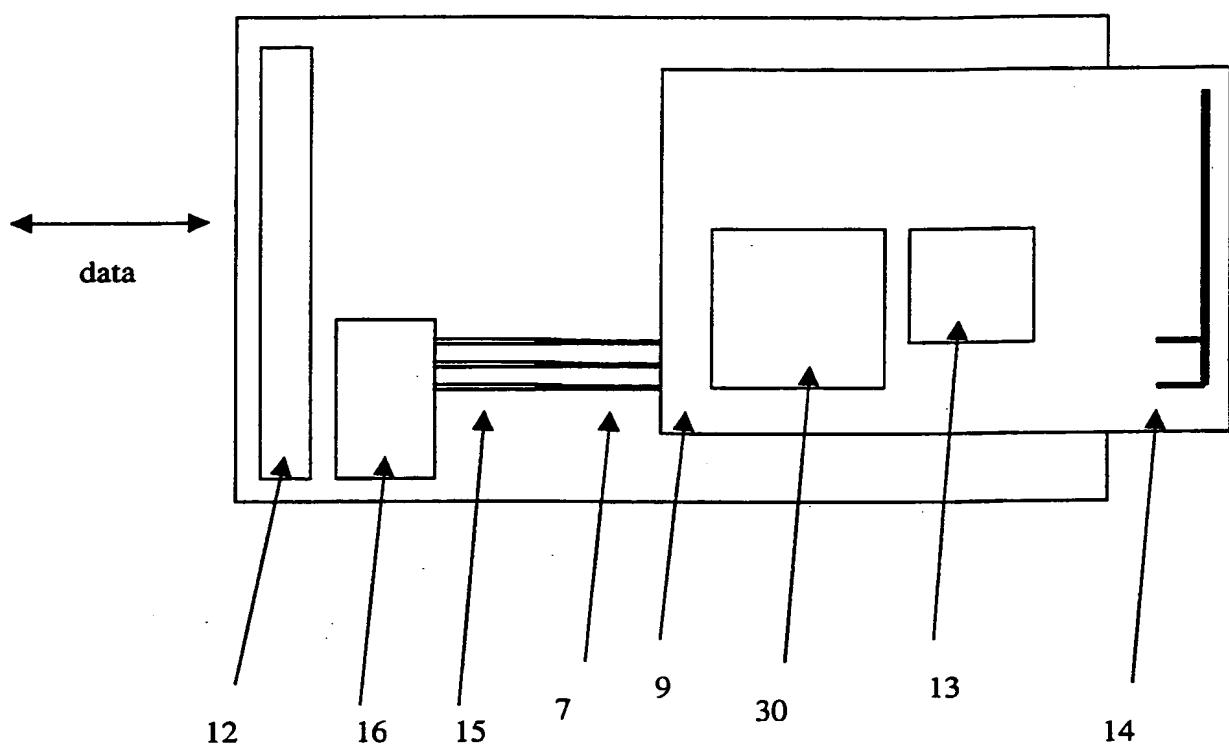


Fig 10

11/11

Figure 11

091889306

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
25 May 2001 (25.05.2001)

PCT

(10) International Publication Number
WO 01/37437 A3

(51) International Patent Classification?: **H04B 1/38,**
H01Q 1/24

Lionel [GB/GB]; West Wing, Sandhill House, Middle
Claydon, Bucks MK18 2LD (GB). **HORAN, Richard,**
J. [GB/US]; 246 Beach 127th Street, Belle Harbor, NY
11694 (US).

(21) International Application Number: **PCT/GB00/04339**

(22) International Filing Date:
15 November 2000 (15.11.2000)

(74) Agent: **ORIGIN LIMITED**; 52 Muswell Hill Road, London N10 3JR (GB).

(25) Filing Language: **English**

(81) Designated States (national): CN, GB, JP, US.

(26) Publication Language: **English**

(84) Designated States (regional): European patent (AT, BE,
CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC,
NL, PT, SE, TR).

(30) Priority Data:
9926984.7 15 November 1999 (15.11.1999) GB
0000783.1 14 January 2000 (14.01.2000) GB

Published:
— with international search report


(71) Applicant (for all designated States except US): **PSION CONNECT LIMITED** [GB/GB]; Presley Way, Crownhill, Milton Keynes MK8 0EF (GB).

(88) Date of publication of the international search report:
10 May 2002

(72) Inventors; and
(75) Inventors/Applicants (for US only): **WOLOVITZ,**

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: REMOVABLE WIRELESS DEVICE

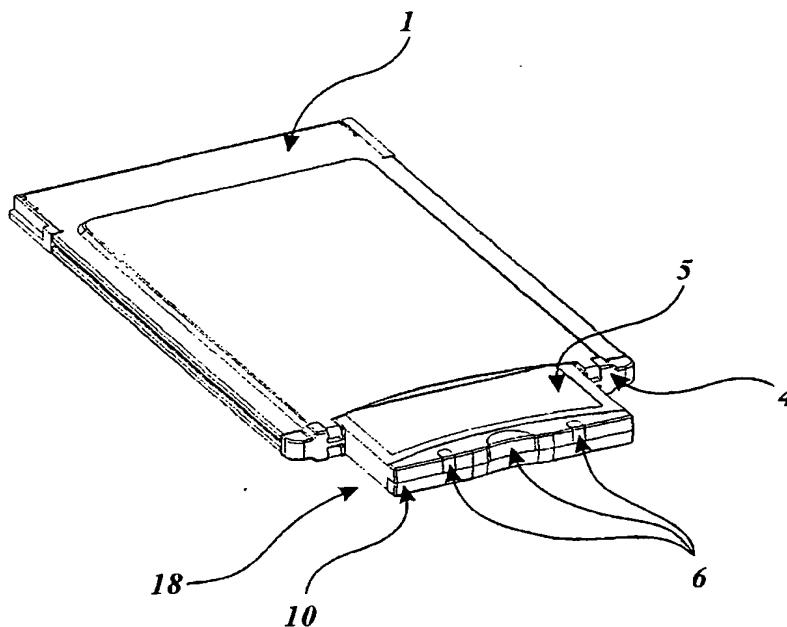

WO 01/37437 A3

(57) Abstract: A PC Card includes a slide out antenna platform on which is also mounted at least one component, such as a baseband processor, which can perform digital processes. Placing the component(s) which perform(s) digital processes next to the antenna removes the need for a flexible and expensive connection which would be required if, for example, the platform included solely HF components. When the platform partly slides out of the PC Card casing, it automatically turns the device on; sliding the platform back in automatically turns the device off. The platform can also be fully removed from the PC Card for replacement with an upgrade.

INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 00/04339

A. CLASSIFICATION OF SUBJECT MATTER
 IPC 7 H04B1/38 H01Q1/24

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
 IPC 7 H04B H01Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 918 163 A (ROSSI MARKKU J) 29 June 1999 (1999-06-29)	1-12, 15-24
A	abstract column 2, line 52 -column 3, line 36 figure 1 ---	13,14, 25-27
X	EP 0 936 694 A (NORTHROP GRUMMAN CORP) 18 August 1999 (1999-08-18)	1-12, 15-24
A	abstract column 2, line 20 -column 5, line 47 figure 5 ---	13,14, 25-27
X	US 5 563 400 A (LE ROUX JEAN-YVES) 8 October 1996 (1996-10-08)	25,28-35
A	the whole document ---	26,27
		-/-

Further documents are listed in the continuation of box C.

Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority, claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

& document member of the same patent family

Date of the actual completion of the international search

Date of mailing of the international search report

11 July 2001

18/07/2001

Name and mailing address of the ISA

Authorized officer

European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl.
 Fax: (+31-70) 340-3016

Lindhardt, U

INTERNATIONAL SEARCH REPORT

National Application No

PCT/GB 00/04339

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 680 112 A (ROCKWELL INTERNATIONAL CORP) 2 November 1995 (1995-11-02) abstract	25-27
A	column 3, line 45 -column 4, line 28 figure 2 -----	1,13-15, 33,34

INTERNATIONAL SEARCH REPORT

Information on patent family members

National Application No

PCT/GB 00/04339

Patent document cited in search report	Publication date	Patent family member(s)			Publication date
US 5918163	A 29-06-1999	NONE			
EP 0936694	A 18-08-1999	US	6172645 B		09-01-2001
US 5563400	A 08-10-1996	FR	2710996 A		14-04-1995
		EP	0647918 A		12-04-1995
		JP	7239924 A		12-09-1995
		DE	69418810 D		08-07-1999
		DE	69418810 T		21-10-1999
		ES	2136178 T		16-11-1999
		SG	48176 A		17-04-1998
EP 0680112	A 02-11-1995	US	5606732 A		25-02-1997
		JP	7303052 A		14-11-1995